

Gravity Drop Adapters



31440-225AL



41440-225AL



40447ST

*FKM seal available.


See pages 88-90 for repair parts.

Threaded connection available on request.

PART NO.	DESCRIPTION
31440-225AL	4" API to 3" drop adapter with Buna-N flat gasket
41440-225AL	4" API to 4" drop adapter with Buna-N flat gasket
40447ST	Heavy duty chain

TTMA Flanged Sight Flow Indicators

Features & Benefits:



5200-SFI shown mounted on petroleum tank



5200-SFI

- Due to the proprietary blending of petroleum products, Dixon™ recommends that the thermoplastic tubing and the gaskets be immersion tested in the product to be handled to ensure compatibility (not compatible with crude oil). ⚠
- Durable cast aluminium housing replaces competitions all acrylic sight glass commonly found on tank trucks
- Allows for visual identification of the fuel grade prior to opening the valve
- Works with tank truck flanged butterfly valves found on gasoline trucks
- Low cost sight glass tube can be easily replaced
- Rated to 150 PSI

PART NO.	DESCRIPTION
5200-SFI-3	3" TTMA flange sight flow, 1 3/4" width, 3 1/2" inside diameter
5200C-SFI-3 ¹	3" TTMA flange sight flow, 1 3/4" width, 3 1/2" inside diameter, stainless retain ring
5200-SFI	4" TTMA flange sight flow, 1 3/4" width, 4" inside diameter
5200C-SFI ¹	4" TTMA flange sight flow, 1 3/4" width, 4" inside diameter, stainless retain ring

¹ Are compatible with crude oil.

Note: Maximum flange bolt torque is 200 in-lb (inch pounds) ⚠

Features & Benefits:



5201-SFI

- Due to the proprietary blending of petroleum products, Dixon™ recommends that the thermoplastic tubing and the gaskets be immersion tested in the product to be handled to ensure compatibility (not compatible with crude oil). ⚠
- Allows for visual identification of the fuel grade prior to opening the valve
- Works with tank truck flanged butterfly valves found on gasoline trucks
- Larger ID 4" flow indicator allows tank truck flanged butterfly valves to connect to either end of the indicator
- Rated to 150 PSI

PART NO.	DESCRIPTION
5201-SFI	4" TTMA flange sight flow, 3 1/4" width, 4" inside diameter
5201-SFI-3	3" TTMA flange sight flow, 3 1/4" width, 3 1/2" inside diameter

TTMA Flanges



TTF4AL-4MT



TTF4AL-4EMT



TTF4AL-4FT



TTF4AL



TTF400SP

PART NO.	DESCRIPTION
TTF3AL-3MT	3" TTMA flange x 3" male NPT, 2 1/2" overall length
TTF4AL-3MT	4" TTMA flange x 3" male NPT, 2 1/2" overall length
TTF4ALHC-3MT	4" TTMA flange x 3" male NPT, 2 1/2" overall length, hardcoated
TTF4AL-3EMT	4" TTMA flange x 3" male NPT, 5 1/2" overall length
TTF4AL-3FT	4" TTMA flange x 3" female NPT, 2 1/2" overall length
TTF4AL-4MT	4" TTMA flange x 4" male NPT, 2 1/2" overall length
TTF4ALHC-4MT	4" TTMA flange x 4" male NPT, 2 1/2" overall length, hardcoated
TTF4AL-4EMT	4" TTMA flange x 4" male NPT, 5 1/2" overall length
TTF4AL-4FT	4" TTMA flange x 4" female NPT, 2 1/2" overall length
TTF3AL	3" TTMA butt weld on flange
TTF4AL	4" TTMA butt weld on flange
TTF400SP	4" TTMA socket weld on flange

See page 11 for TTMA flange gaskets.

TTMA Flange x Cam and Groove



400-ALT-AL



4022ALTAL



400-DLT-AL



4022DLTAL


PART NO.	DESCRIPTION
300-ALT-AL	3" TTMA flange x 3" cam and groove adapter (straight)
3040ALTAL	3" TTMA flange x 4" cam and groove adapter (straight)
400-ALT-AL	4" TTMA flange x 4" cam and groove adapter (straight)
40022ALTAL	4" TTMA flange x 4" cam and groove adapter (22 1/2°)
600-ALT-AL	6" TTMA flange x 6" cam and groove adapter (straight)
300-DLT-AL	3" TTMA flange x 3" cam and groove coupler (straight)
3040DLTAL	3" TTMA flange x 4" cam and groove coupler (straight)
400-DLT-AL	4" TTMA flange x 4" cam and groove coupler (straight)
40022DLTAL	4" TTMA flange x 4" cam and groove coupler (22 1/2°)

See page 11 for TTMA flange gaskets.

TTMA Flange Reducer



4443

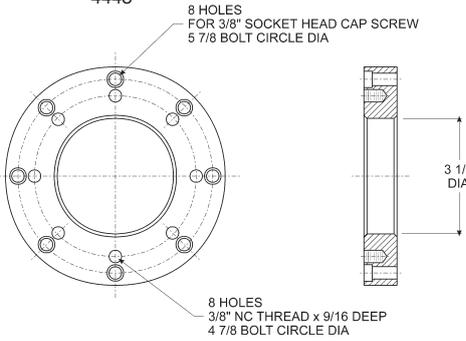


PART NO.	DESCRIPTION
4443	4" TTMA x 3" TTMA reducer flange

TTMA Butterfly Valve Spacer



FG4540

PART NO.	DESCRIPTION
FG4540	4" TTMA flange spacer

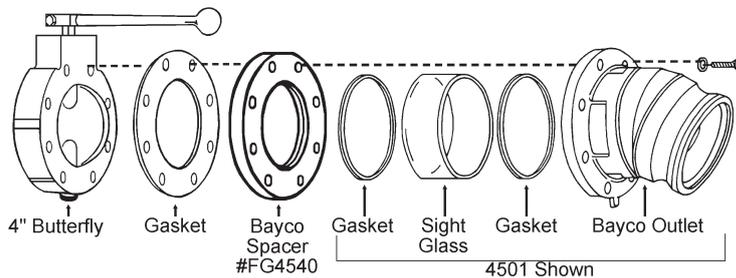

API and TTMA Flange Gaskets



PART NO.	SIZE	DESCRIPTION	OD	ID	THICKNESS	BOLT CIRCLE
300GTTFCB	3"	TTMA - Cork/Buna	5-5/8"	3 1/2"	"	4-7/8"
300GTTFBL	3"	TTMA - Baylast™	5-5/8"	3-5/8"	"	4-7/8"
300GTTFK	3"	TTMA Klinger nylon	5-5/8"	3 1/2"	"	4-7/8"
40321TF	3"	TTMA - PTFE with soft fiber core	5-29/32"	3 1/2"	3/32"	4-7/8"
40364TF	3"	API Sump - PTFE with soft fiber core	7 1/4"	5"	5/32"	6 1/4"
40364BL	3"	API Sump - Baylast™	7 1/4"	5"	"	6 1/4"
400GTTFCB	4"	TTMA - Cork/Buna	6-5/8"	4-9/16"	"	5-7/8"
400GTTFBL	4"	TTMA - Baylast™	6-5/8"	4-5/8"	"	5-7/8"
400GTTFK	4"	TTMA Klinger nylon	6-5/8"	4-9/16"	"	5-7/8"
40322TF	4"	TTMA - PTFE with soft fiber core	6-7/8"	4-5/8"	3/32"	5-7/8"
40323TF	4"	API Sump - PTFE with soft fiber core	8-3/8"	5-7/8"	5/32"	7 1/4"
40323BL	4"	API Sump - Baylast™	8 1/4"	6"	"	7 1/4"